





## HECM244... Serie

### 2-Phasen-Schrittmotor

### [1,8° High-Torque-Version]

| Model<br>A = Single Shaft<br>B = Double Shaft | ● Bipolar Seriell      |                           |                                |                               | ● Unipolar             |                           |                                |                               | Speed<br>Torque |
|-----------------------------------------------|------------------------|---------------------------|--------------------------------|-------------------------------|------------------------|---------------------------|--------------------------------|-------------------------------|-----------------|
|                                               | Holding Torque<br>[Nm] | Current /<br>Phase<br>[A] | Resistance /<br>Phase<br>[Ohm] | Inductance /<br>Phase<br>[mH] | Holding Torque<br>[Nm] | Current /<br>Phase<br>[A] | Resistance /<br>Phase<br>[Ohm] | Inductance /<br>Phase<br>[mH] |                 |
| HECM244-F1.3 (A/B)                            | 0.50                   | 1.3                       | 3.6                            | 6.0                           | —                      | —                         | —                              | —                             | G1              |
| HECM244-F0.9 (A/B)                            | 0.50                   | 0.85                      | 8.0                            | 14.0                          | —                      | —                         | —                              | —                             | G2              |

| Number of Leads | Weight of Motor | Size Length | Rotor Inertia                          |
|-----------------|-----------------|-------------|----------------------------------------|
| 4               | 0.25 kg         | 41 mm       | 57 x 10 <sup>-7</sup> kgm <sup>2</sup> |

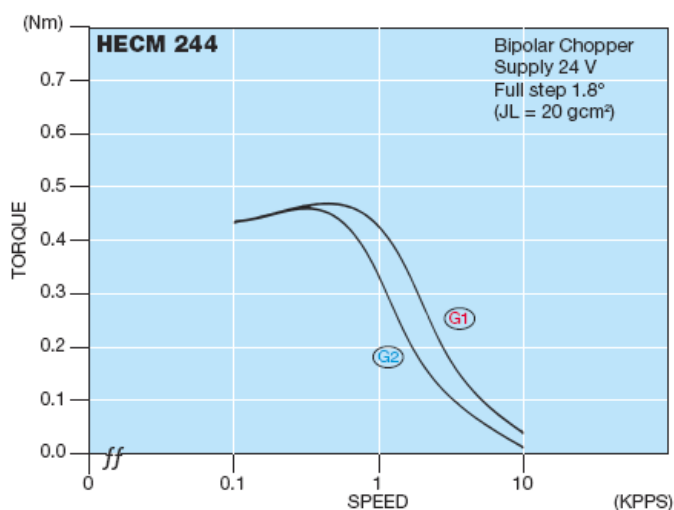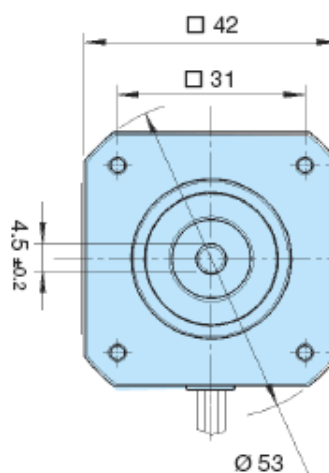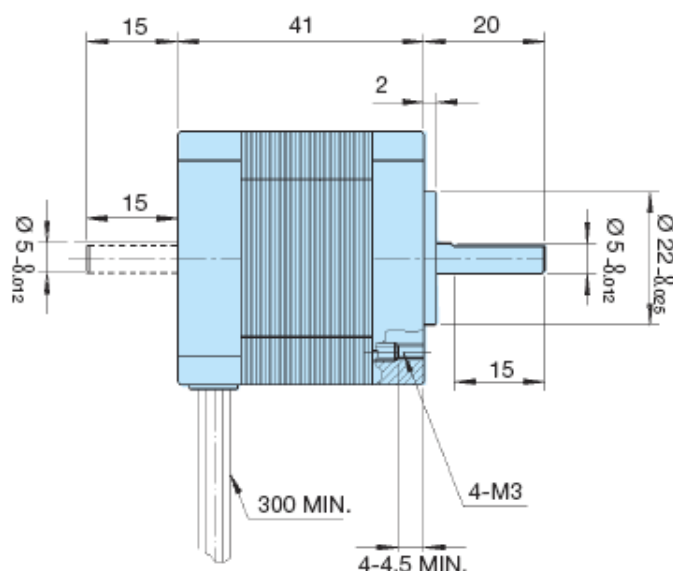

Planetengetriebe sind optional erhältlich