


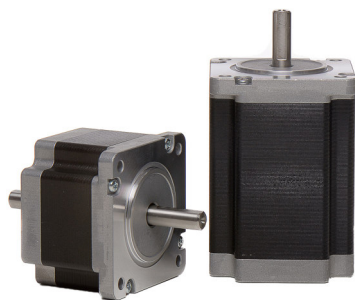

HECM267... Serie



2-Phasen-Schrittmotor

[1,8° High-Torque-Version]

Model A = Single Shaft B = Double Shaft	● Bipolar Parallel				● Bipolar Serial				● Unipolar				Torque Speed- curve
	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	
HECM267-E2.4 (A/B)	2.35	3.5	0.75	3.1	2.35	1.75	3.0	12.4	1.75	2.45	1.5	3.1	C1
HECM267-E3.0 (A/B)	2.35	4.2	0.5*	2.0	2.35	2.1	2.0*	8.0	1.75	3.0	1.0*	2.0	C2


Number of Leads	Weight of Motor	Size Length	Rotor Inertia
8	1.1 kg	60 x 60 x 65 mm	$570 \times 10^{-7} \text{ kgm}^2$

Resistance / Phase (Ω) = $\pm 10\%$, (* $\pm 15\%$), Inductance / Phase (mH) = $\pm 20\%$

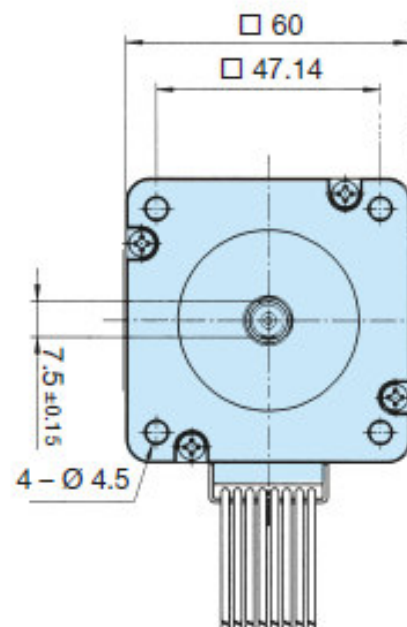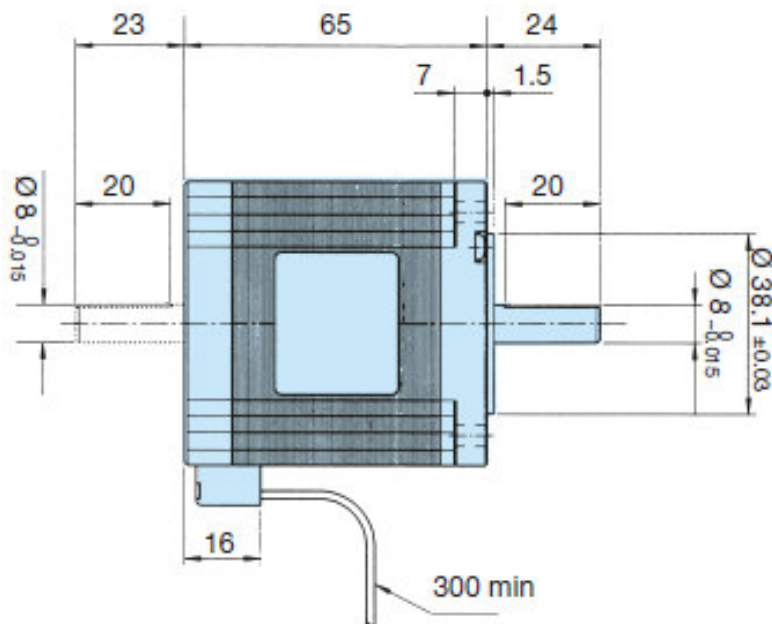


Planetengetriebe sind optional erhältlich


(C1) Motor: HECM267-E2.4A/B Motor:
Driver: ECMD288.000 (24V; 3.5A)

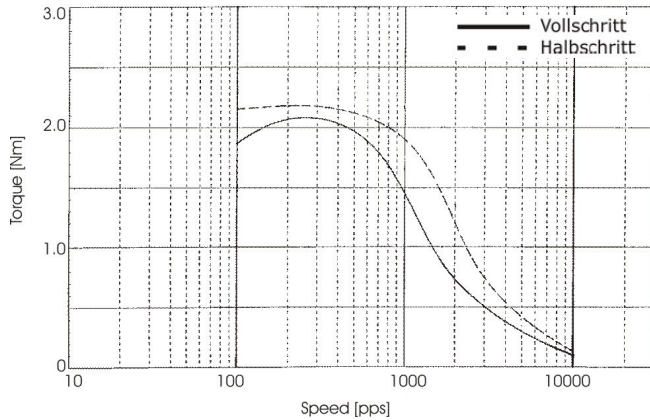


(C1) Motor: HECM267-E2.4A/B Motor:
Driver: ECMD288.000 (48V; 3.5A)

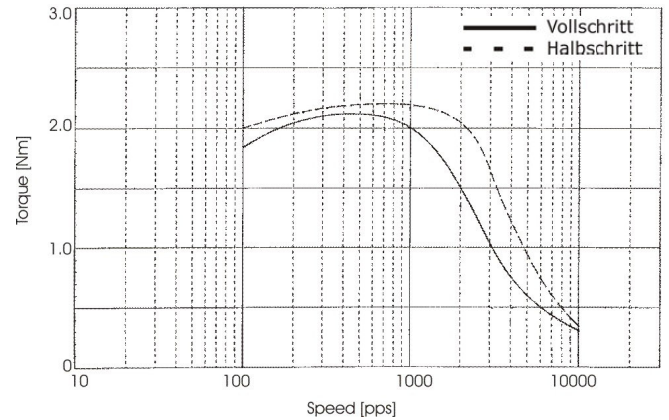

(C2) Motor: HECM267-E3.0A/B Motor:
Driver: ECMD288.000 (24V; 4.2A)

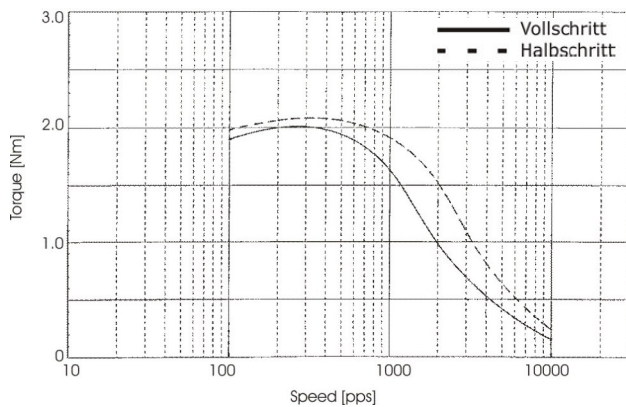

(C2) Motor: HECM267-E3.0A/B Motor:
Driver: ECMD288.000 (48V; 4.2A)

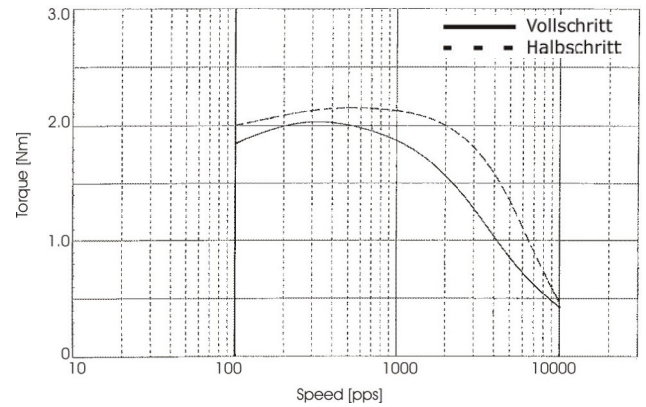

LEAD No.	LEAD COLOR
1	ORANGE
2	BLACK / WHITE
3	RED / WHITE
4	YELLOW
5	BLACK
6	ORANGE / WHITE
7	YELLOW / WHITE
8	RED

