


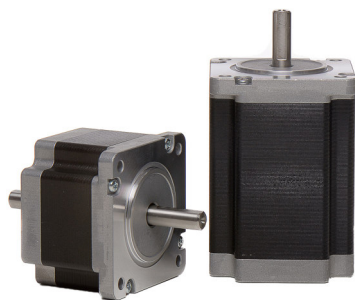

HECM269... Serie


2-Phasen-Schrittmotor

[1,8° High-Torque-Version]

Model A = Single Shaft B = Double Shaft	● Bipolar Parallel				● Bipolar Serial				● Unipolar				Torque Speed- curve
	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	
HECM269-E2.4 (A/B)	3.30	3.5	1.0	5.0	3.30	1.75	4.0	20.0	2.45	2.45	2.0	5.0	Ⓛ1
HECM269-E3.0 (A/B)	3.30	4.2	0.65*	3.2	3.30	2.1	2.6*	12.8	2.45	3.0	1.3*	3.2	Ⓛ2


Number of Leads	Weight of Motor	Size Length	Rotor Inertia
8	1.45 kg	60 x 60 x 85 mm	900 x 10 ⁻⁷ kgm²

Resistance / Phase (Ω) = ± 10%, (* ± 15%), Inductance / Phase (mH) = ± 20%

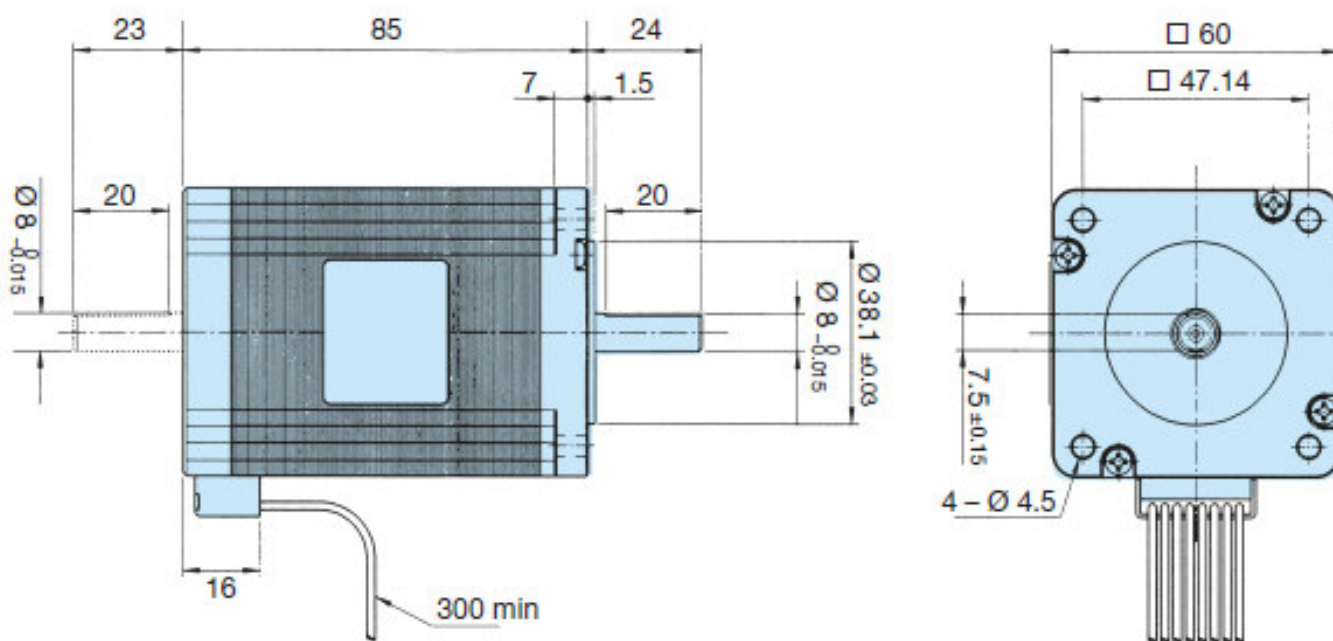


Planetengetriebe sind optional erhältlich


(D1) Motor: HECM269-E2.4A/B Motor:
Driver: ECMD288.000 (24V; 3.5A)

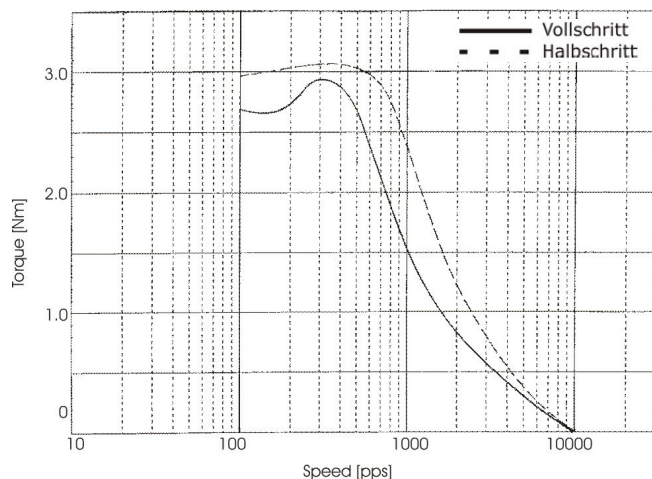


(D1) Motor: HECM269-E2.4A/B Motor:
Driver: ECMD288.000 (48V; 3.5A)

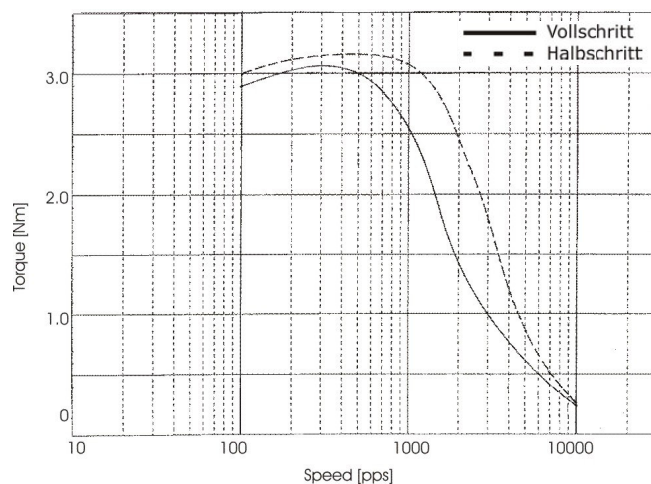

(D2) Motor: HECM269-E3.0A/B Motor:
Driver: ECMD288.000 (24V; 4.2A)

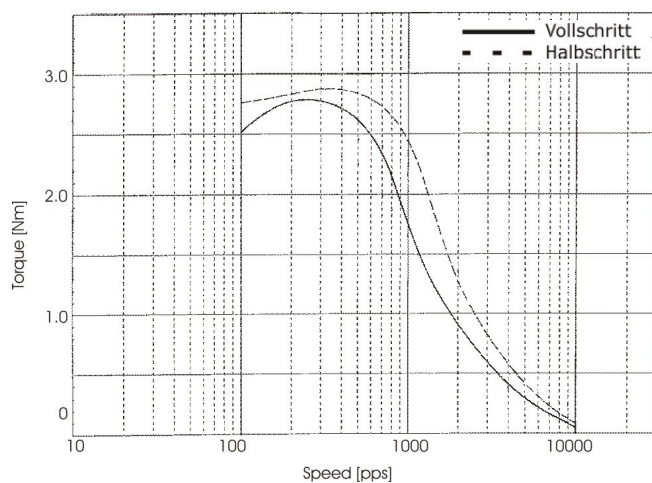

(D2) Motor: HECM269-E3.0A/B Motor:
Driver: ECMD288.000 (48V; 4.2A)

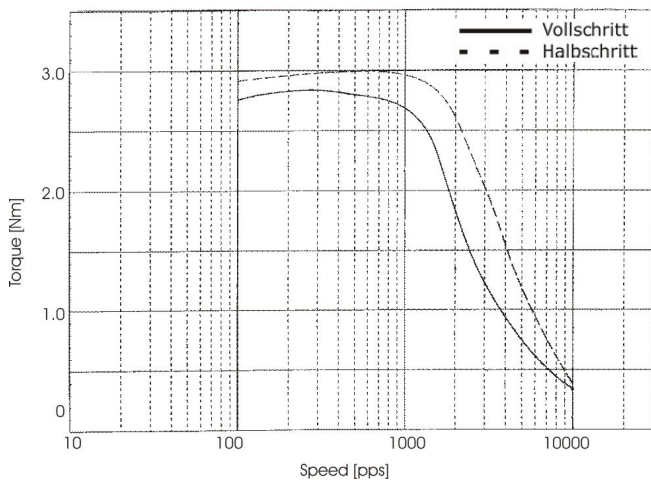

LEAD No.	LEAD COLOR
1	ORANGE
2	BLACK / WHITE
3	RED / WHITE
4	YELLOW
5	BLACK
6	ORANGE / WHITE
7	YELLOW / WHITE
8	RED

